

## **PRODUCT DATA DRAWING**

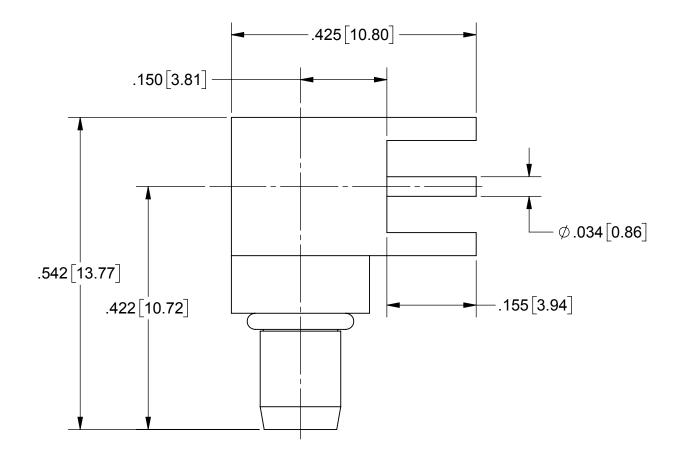

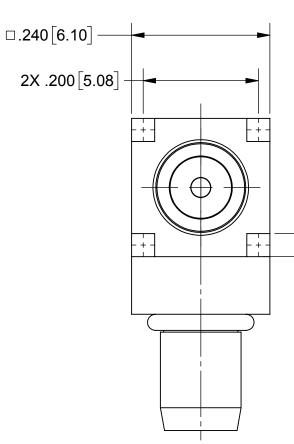

NOTES:

## **MATERIAL:**

- STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:
- CONTACT: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
- PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B INSULATOR:
- O-RING: **FLUOROSILICONE**

FINISH:

BODY & CONTACT:	GOLD PER ASTM B488, TYPE II,	MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	UNLESS O
	CODE C, CLASS 1.27, ÓVER NIĆKEL	FINISH:	SEE NOTES	DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS A 2) ALL DIMENSIONS A 3) BREAK CORNERS A
	PER AMS-QQ-N-290, CLASS 1, .00005" MIN.	SURFACE AR	<sup>REA:</sup> N/A	.XXX ±.005	4) CHAM. 1ST & LAST 5) SURFACE ROUGH 6) DIA.'S ON COMMON
PERFORMANCE:			PROPRIETARY	PER ASME Y14.5M - 1994	WITHIN .005 T.I.R. 7) REMOVE ALL BURF
		THE INFORMAT	TION CONTAINED IN THIS DRAWING	THIRD ANGLE PROJECTION	DRAWN:
IMPEDANCE:	50 OHMS	ANY REPROD	DLE PROPERTY OF SV MICROWAVE, INC. RODUCTION IN PART OR AS A WHOLE THE WRITTEN PERMISSION OF		CHECKED:
			/E, INC IS PROHIBITED.		APPROVED

REVISION HISTORY						
REV	DESCRIPTION	DATE	APPROVED			
-	- DCN 43104		MAL			

-4X .040[1.02]

## 1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800)

UNLESS OTHERWISE SPECIFIED ) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] ) ALL DIMENSIONS ARE AFTER PLATING. ) BREAK CORNERS & EDGES .005 R. MAX.			Amphenol 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409			
I) CHAM, 1ST & LAST THREADS. I) SURFACE ROUGHNESS 63 MIL-STD-10. I) DIA IS ON COMMON CENTERS TO BE CONCENTRIC		TITLE:				
b) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. D REMOVE ALL BURRS		BMMA MALE R/A BOARD				
DRAWN:	VB 02/15/17	MOUNT				
DIVININ.	VB 02/10/11	SIZE	CAGE CODE	DWG. NO.	4440.0	0004
CHECKED:	MAL 02/15/17	В	95077		1412-6	0001
APPROVED:	MAL 02/15/17	S	CALE: 1:1			SHEET 1 OF 2